
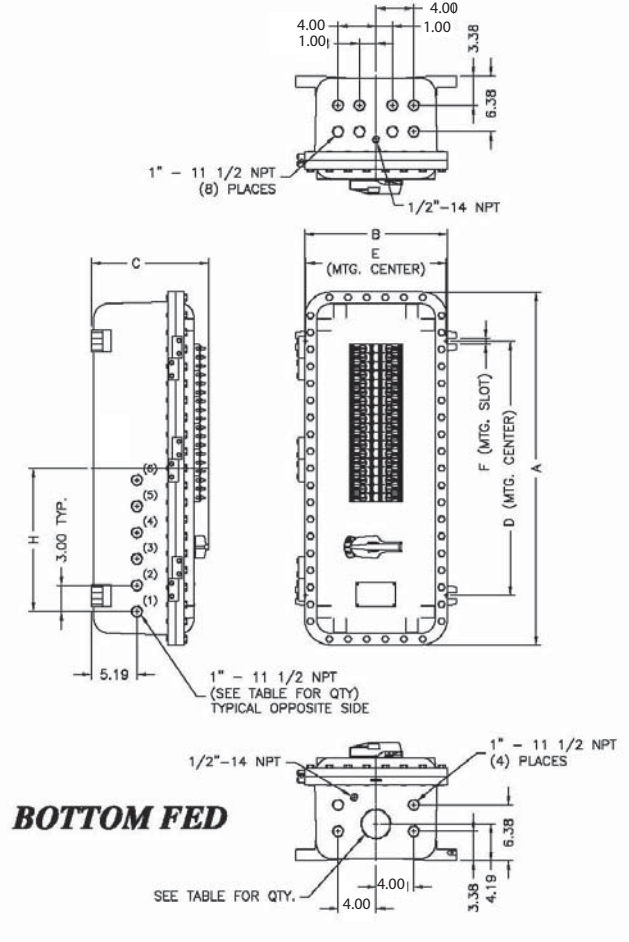


PANELBOARDS

Explosionproof Panelboards Vertical Main Breaker

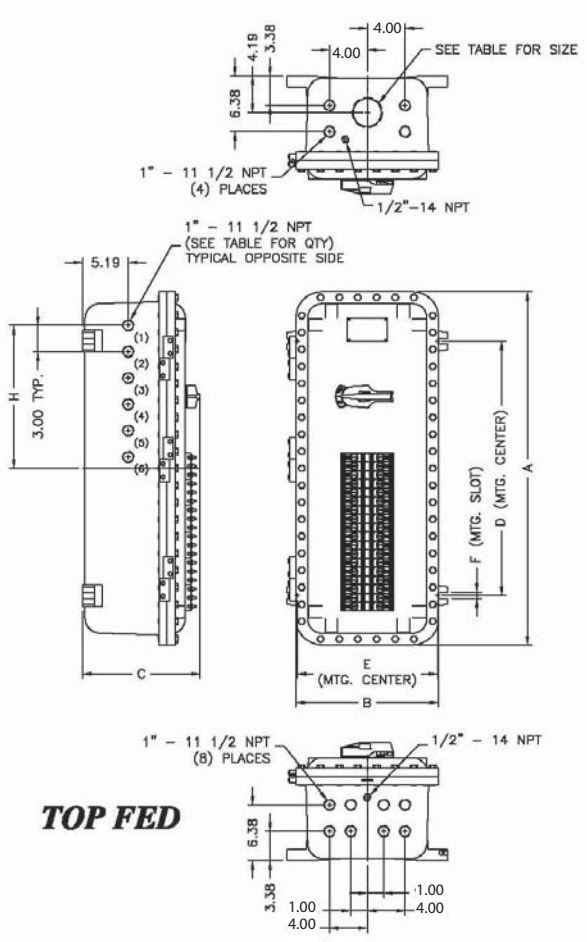

EXPLOSIONPROOF
Panelboards

CERTIFICATIONS

- Class I, Groups B, C, D
- Class II, Groups F & G
- Class III
- Class I, Zone 1, AE x d IIB
- Ex d IIB+H₂
- Type 4X, 7, 9
- IP66



DIMENSIONAL OUTLINE

Catalog #	A	B	C	D	E	F	MAIN CONDUIT FED SIZE	H	LEFT & RIGHT SIDE HOLE LOCATIONS AND QTY'S	XP ENCLOSURE
X1PB1-121-M1_	28.25	16.25	12.94	18.38	15.75	.63	2"	10.00	1 THRU 3	XCEX 122408 N4
X1PB1-241-M1_	40.25	16.25	13.38	18.38	15.75	.68	2.5"	16.00	1 THRU 4	XCEX 123608 N4
X1PB1-241-M2_	40.25	16.25	13.38	29.00	15.75	.68	3"	16.00	1 THRU 4	XCEX 123608 N4
X1PB1-361-M2_	50.25	16.25	13.38	39.00	15.75	.68	3"	21.00	1 THRU 6	XCEX 124608 N4
X1PB1-421-M2_	50.25	16.25	13.38	39.00	15.75	.68	2"	21.00	1 THRU 6	XCEX 124608 N4
X1PB1-123-M1_	28.25	16.25	12.94	18.38	15.75	.63	2.5"	10.00	1 THRU 3	XCEX 122408 N4
X1PB1-243-M1_	40.25	16.25	13.38	29.00	15.75	.68	2.5"	16.00	1 THRU 4	XCEX 123608 N4
X1PB1-243-M2_	40.25	16.25	13.38	29.00	15.75	.68	3"	16.00	1 THRU 4	XCEX 123608 N4
X1PB1-363-M2_	50.25	16.25	13.38	39.00	15.75	.68	3"	21.00	1 THRU 6	XCEX 124608 N4
X1PB1-423-M2_	50.25	16.25	13.38	39.00	15.75	.68	2"	21.00	1 THRU 6	XCEX 124608 N4
X1PB2-123-M1_	28.25	16.25	12.94	18.38	15.75	.63	2"	10.00	1 THRU 3	XCEX 122408 N4
X1PB2-243-M1_	40.25	16.25	13.38	29.00	15.75	.68	2.5"	16.00	1 THRU 4	XCEX 123608 N4
X1PB2-243-M2_	40.25	16.25	13.38	29.00	15.75	.68	2.5"	16.00	1 THRU 4	XCEX 123608 N4
X1PB2-363-M2_	50.25	16.25	13.38	39.00	15.75	.68	3"	21.00	1 THRU 6	XCEX 124608 N4
X1PB2-423-M2_	50.25	16.25	13.38	39.00	15.75	.68	3"	21.00	1 THRU 6	XCEX 124608 N4

LIGHTING PANELS

Catalog #	# Branch Breakers	Eaton Cutler Hammer Pow-R-Line C Panelboards			Chassis Type
		Electrical Rating	Main Brkr Type	Buss Amp	
X1PB1-121-M1_	12	1Ø-3W 120/240V	EHD2100	100	PRL1A
X1PB1-241-M1_	24	1Ø-3W 120/240V	EHD2100	100	PRL1A
X1PB1-241-M2_	24	1Ø-3W 120/240V	FD2225	225	PRL1A
X1PB1-361-M2_	36	1Ø-3W 120/240V	FD2225	225	PRL1A
X1PB1-421-M2_	42	1Ø-3W 120/240V	FD2225	225	PRL1A
X1PB1-123-M1_	12	3Ø-4W 120/208V	EHD2100	100	PRL1A
X1PB1-243-M1_	24	3Ø-4W 120/208V	EHD2100	100	PRL1A
X1PB1-243-M2_	24	3Ø-4W 120/208V	FD2225	225	PRL1A
X1PB1-363-M2_	36	3Ø-4W 120/208V	FD2225	225	PRL1A
X1PB1-423-M2_	42	3Ø-4W 120/208V	FD2225	225	PRL1A
X1PB2-123-M1_	12	3Ø-4W 277/480V	EHD3100	100	PRL2A
X1PB2-243-M1_	24	3Ø-4W 277/480V	EHD3100	100	PRL2A
X1PB2-243-M2_	24	3Ø-4W 277/480V	FD3225	225	PRL2A
X1PB2-363-M2_	36	3Ø-4W 277/480V	FD3225	225	PRL2A
X1PB2-423-M2_	42	3Ø-4W 277/480V	FD3225	225	PRL2A

BRANCH CIRCUIT OPERATING HANDLES & PLUGS

Catalog #	DESCRIPTION
X1PB1-H1	SINGLE POLE PL1A BREAKER HANDLE
X1PB1-H2	TWO POLE PL1A BREAKER HANDLE
X1PB1-H3	THREE POLE PL1A BREAKER HANDLE
X1PB2-H	PL2A BREAKER HANDLE (ALL POLES)
X1PB1-HGL1	SINGLE POLE PL1A GFI/EPD BREAKER HANDLE - LEFT HAND
X1PB1-HGR1	SINGLE POLE PL1A GFI/EPD BREAKER HANDLE - RIGHT HAND
X1PB1-HGL2	TWO POLE PL1A GFI/EPD BREAKER HANDLE - LEFT HAND
X1PB1-HGR2	TWO POLE PL1A GFI/EPD BREAKER HANDLE - RIGHTHAND
X1PB-MB	VERTICAL MAIN BREAKER HANDLE ASSEMBLY
15562-7	BRANCH SPACE PLUG
18023	XPPH-N4 MAIN BREAKER PLUG

BRANCH BREAKERS

PRL1A	PRL2A
BAB	
QBGF	GHB
QBGFEP	

NOTES:

1. For Bottom Fed Model add suffix -B
2. For Top Fed Model add suffix -T
3. 10kA Maximum Interrupting Capacity (Sym.)